


FLOOR PLAN

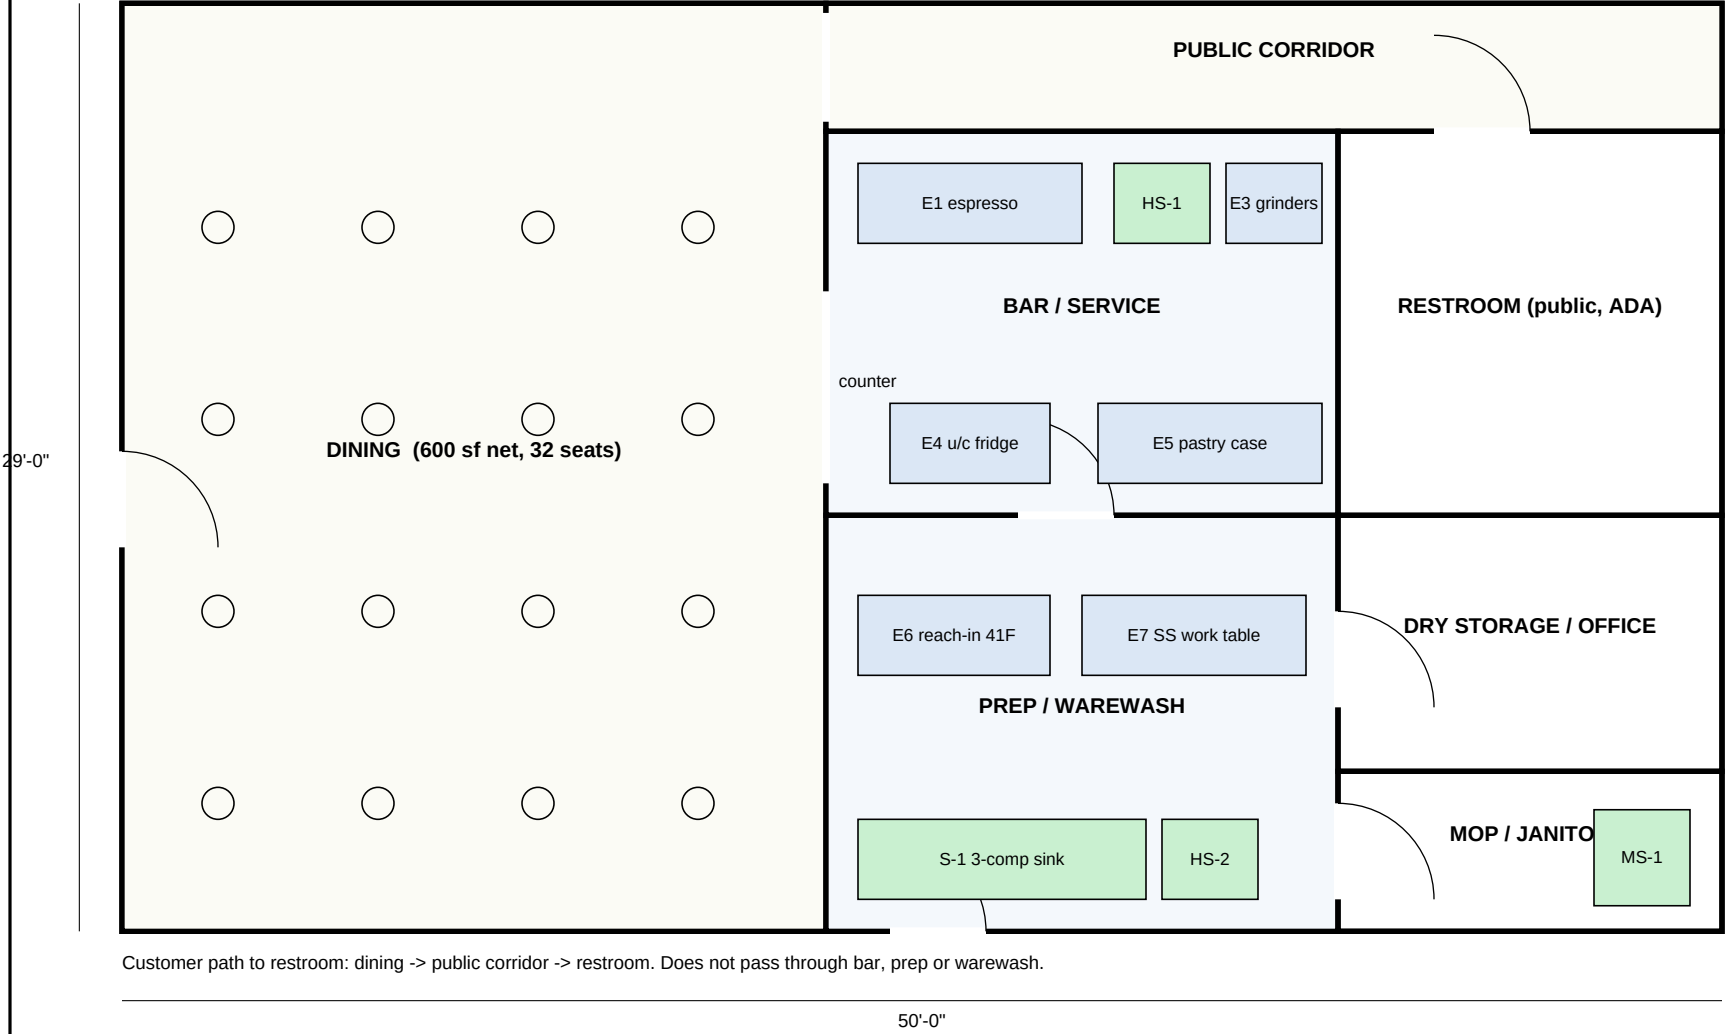

EQUIPMENT SCHEDULE

Tag	Item	Spec
E1	2-group espresso machine	NSF/ANSI 4, on legs 4 in.
E3	Grinders (3)	NSF, counter-sealed
E4	Under-counter refrigerator	NSF/ANSI 7, 41 F
E5	Refrigerated pastry case	NSF/ANSI 7
E6	Reach-in refrigerator	NSF/ANSI 7, 6 in. legs
E7	Stainless work table	NSF/ANSI 2, 6 in. legs
S-1	3-comp sink 18x18x12 + 2 drainboards	NSF, indirect waste to GI-1
HS-1/2	Hand sinks, 100 F mixing valve	20-sec metered faucet
MS-1	Mop sink (floor, curbed)	to GI-1
GI-1	Grease interceptor 100 gal	Exterior + sample well SW-1

ROOM FINISH SCHEDULE

Room	Floor	Base	Walls	Ceiling
Bar / Prep	Quarry tile	Coved tile	FRP white to 8 ft	Vinyl-faced ACT, white (LRV 85)
Restroom	Ceramic tile	Coved tile	Tile to 4 ft / paint	Gyp. bd, semi-gloss white
Mop / storage	Sealed concrete	Coved vinyl	FRP white	Vinyl-faced ACT, white
Dining	LVT	Rubber	Paint	Open (dining only)

GENERAL / HEALTH CODE NOTES

- OCCUPANT LOAD: dining 600 sf / 15 = 40; bar/prep/storage 850 sf / 200 = 5 -> 42 total (< 50). Group B per IBC 303.1.1.
- Hand sinks within 20 ft of espresso bar, prep and warewash, no doors in path (Sec. 20-21.19).
- 3-comp sink compartments >= 15x15x12 in. (Sec. 20-21.11).
- Interceptor + sample well per Sec. 47-513; sized per Houston Plumbing Code.
- Lighting: 50 fc prep/bar, 20 fc ware/restroom, 10 fc storage; shielded fixtures over food.
- No cooking appliances; no Type I hood required. Electric equipment only.
- Public restroom accessible without passing through prep (Houston Bldg. Code 2902).
- Pest: self-closing rear door, air curtain at service door.

BAYOU BEAN COFFEE

1847 Yale St, Suite 110
Houston, TX 77008
TENANT FINISH-OUT - FOOD SERVICE
Area: 1,450 sf Seats: 32
Sheet A-1 Scale: 1/6" = 1'-0"
Northside Studio Architects (sample)
Date: 06/10/2026

Sealed & signed: P. Natarajan, AIA (sample)